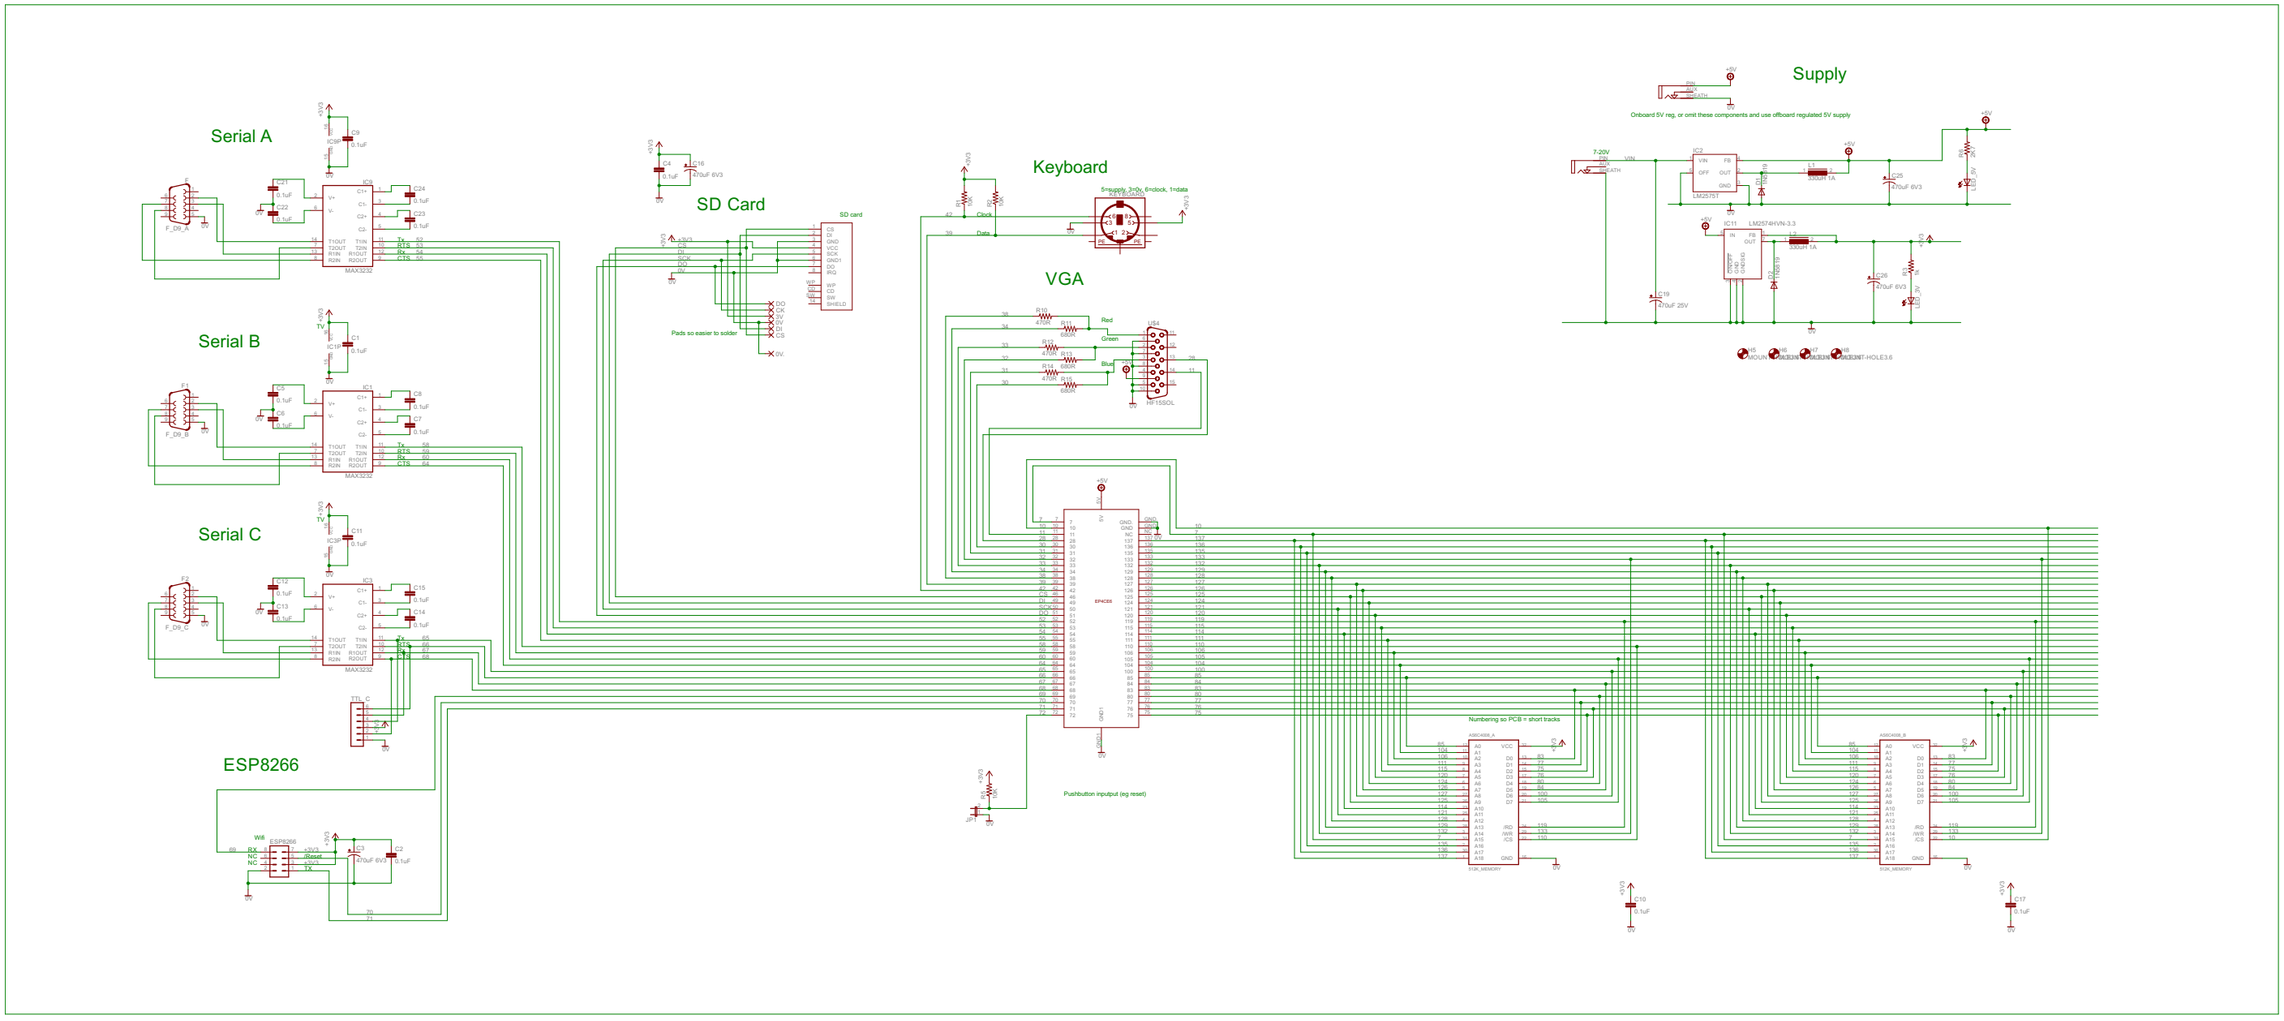
Serial A
Serial B
Serial C
ESP8266
SD Card
Keyboard
VGA
Supply
Onboard 5V reg, or omit these components and use offboard regulated 5V supply
Numbering so PCB = short tracks
Pushbutton inputput (eg reset)
Pads so easier to solder